

Sample Grading

Sieve Shakers

☑ Timer included



↑ **Controls model 15-D403**
 Portable sieve shaker for 200mm dia. sieves, with timer. Positive sieving action both vertically and laterally. Accepts up to 6 x 200mm sieves, plus lid and pan.



← **Controls model 15-D406**
 Circular and vertical sieving action, accepts up to 8 x 200mm, and 6 x 300mm dia sieves, plus lid and pan. Complete with timer.


→ **Controls model 15-D407/B**
 Electromagnetic model with vertical sieving action. Accepts up to 12 x 200mm, and 8 x 300mm dia. sieves, plus lid and pan. Can also be used as a vibrating table by removing the upper frame. Complete with timer.



← **Controls model 15-D0409**
 Electromagnetic digital sieve shaker featuring multiple vibration motion: vertical by the electromagnet and rotational by the three laminated suspension springs in both ways. Supplied with a microprocessor digital control system with display unit for the following functions:

- Timer 0-99 min x 1 min steps or continuous operation
- Continuous or intermittent operation
- Adjustable vibration intensity

Fitted with anti-vibration dampers, which totally isolate the machine from work surfaces reducing the noise level. Accepts up to 12 x 200mm and 9 x 300mm dia. sieves.

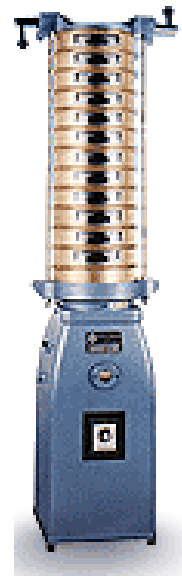

↑ **Pascall INCLYNO**
 Features unique double gyratory and vibratory action. Accepts up to 12 x 200mm sieves (**Model 1**), 7 x 300mm sieves (**Model 2**), 5 x 450mm dia. sieves (**Model 3**).



← **Tyler RO-TAP**
 Recommended for sieving 20 micron and above. Mechanical action is applied in two dimensions - first a horizontal circular motion and second, a vertical, tapping motion, producing accurate and consistent results.